




PROUDLY AUSTRALIAN OWNED  
DESIGNED & ASSEMBLED IN MELBOURNE



PREMIUM GERMAN MADE  
MOTOR SYSTEMS

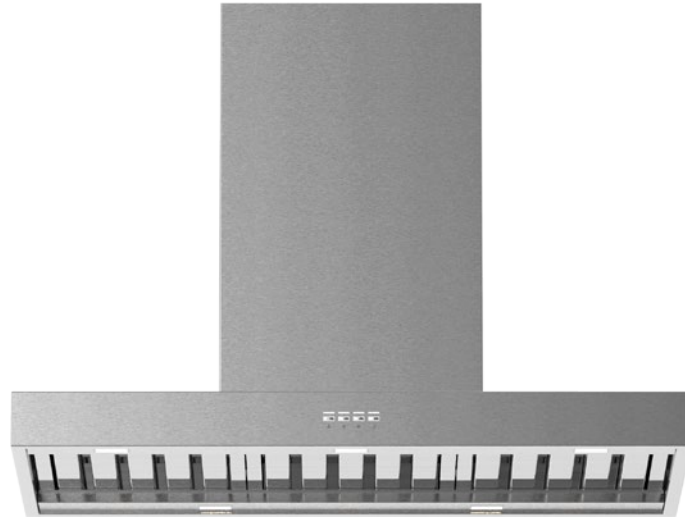

**Product Detail**

<b>Model Number</b>	X5S09S
<b>Hood Mounting</b>	Wall Mounted Canopy
<b>Cooking Coverage</b>	Suits 75cm - 100cm Cooking Surfaces
<b>Filtration</b>	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
<b>Lighting</b>	LED 5x (Warm White 1.0W) - Front & Rear Panels
<b>Finish</b>	<b>AISI304 1.0mm</b> Food-Grade Stainless Steel
<b>Chassis</b>	Triple Layer - Insulated with Sound Deadening Foam
<b>Controls</b>	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
<b>Speed Settings</b>	3 Speed + Boost Mode
<b>Timer Function</b>	Programmable Timer (10min Increments) Auto fan shut off after 2-hours of inactivity
<b>Outlet</b>	Top or Back Duct Outlet
<b>Ducting (Remote)</b>	Dia. 200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied)
<b>Ducting (On Board)</b>	Optional On Board Motor Ducting Kits Available Ultra Motor - Dia. 200mm (Recommended) Power Motor - Dia. 150mm (Recommended)
<b>Hood Width</b>	900mm
<b>Hood Depth</b>	500mm
<b>Hood Height (Fascia)</b>	75mm
<b>Installation Height</b>	700 - 750mm* (Recommended) 600mm* (Minimum) <small>* Clearance above the highest point of the cooktop to the underside of hood</small>



**Filtration Zone**



**Whispair Endurance Warranty**




**Your Hood. Your Colour. Your Way.**

Available Finishes (Stainless Steel Finish Standard)



**Dimensioned Drawing**

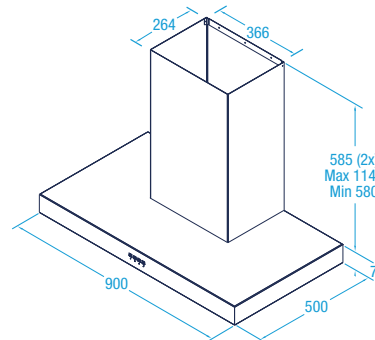

**Available Models - Select Your Motor Solution & Optional Finish**

*On Board*

X5S09S5.OP (/T or /B) Power 1,020m <sup>3</sup> /hr (Top or Back Ducted)	SPL: 53.9dB(A)
X5S09S6.OU (/T or /B) Ultra 1,680m <sup>3</sup> /hr (Top or Back Ducted)	SPL: 56.5dB(A)

*Remote External (Roof or Wall Mounted)*

X5S09S5.EL Lite 800m <sup>3</sup> /hr	SPL: 39.3dB(A) In / 52.7dB(A) Out
X5S09S5.EP Pro 1,140m <sup>3</sup> /hr	SPL: 49.6dB(A) In / 58.5dB(A) Out
X5S09S5.EPP Pro Plus 2,010m <sup>3</sup> /hr	SPL: 56.6dB(A) In / 62.8dB(A) Out

*Remote Inline (Through Wall or Eave)*

X5S09S5.IL Lite 800m <sup>3</sup> /hr	SPL: 39.3dB(A) In / 52.7dB(A) Out
X5S09S5.IP Pro 1,140m <sup>3</sup> /hr	SPL: 49.6dB(A) In / 58.5dB(A) Out

*Your Hood. Your Colour. Your Way. (Optional Wall Mounted Canopy Finish)\**

X1P5.BL	Paint Finish - Satin Black
X1P5.WH	Paint Finish - Satin White
X1P5.CUS	Paint Finish - Custom Colour

\*Additional charges apply

SPL - Nominal Sound Pressure Level on Boost (Max) Speed